

PRESENTS

LED Tickers / LED Scrolling Displays



ALPHA TECHNOCRATZ PRODUCTS
L-96, GROUND FLOOR, STREET No. 7, MAHIPALPUR EXTN.
NEW DELHI-110037
chetan@technocratz.in
www.technocratz.in
9810124109, 8505870707

Sub: LED P10 tile based LED Single color and Multi color Tickers



Technical specifications, size and prices for the LED Tickers

Language	Multi lingual (all language , fonts etc)		
Color	Single color Red (Blue Green Yellow or White) Multi-Color (RGB)		
Box	MS powder coated black		
Transportation	Price ex works Delhi		
Price per unit	Size	Single color Red	Multi-Color
	6" x 2 feet	Rs. 2900/-	Rs. 4400/-
	6" x 3 feet	Rs. 3500/-	Rs. 5600/-
	6" x 4 feet	Rs. 4100/-	Rs. 6800/-
	1 x 2 feet	Rs. 4100/-	Rs. 6800/-
	1 x 3 feet	Rs. 5400/-	Rs. 10200/-
	1 x 4 feet	Rs. 7200/-	Rs. 12800/-
	1 x 5 feet	Rs. 9000/-	Rs. 16000/-
	1 x 6 feet	Rs. 10800/-	Rs. 19200/-
	Larger than 6 square feet. Cost / Sq. feet	Rs. 1800/-	Rs. 3200/-
GST	Extra @ 18%		
Delivery	1 day for ready stock , 1 week if out of stock		
Payment term	100% on inspection and before dispatch		
Warranty	One year		
<ul style="list-style-type: none"> • Hooks/clamps will be provided for hanging • Installation / structure cost not included, engineer will be provided for commissioning and training on TA/DA basis • Packing will be in thermacol, MDF and corrugated sheet for safe transportation • Cost for all displays include regular software with PC / pen drive programming. • Mobile Android programming application, GPRS/GSM interface, LAN connectivity price will be given on demand • Cost for Single color Red is mentioned above and the cost for any other color is 15% higher 			

P10 out door (similar for RGB full color)

Specifications	Project
Pixel Pitch	10 mm
PhysicalPixel Density	10000 dots/m ²
Pixel composition	1 Red
Display colors	SINGLE (RED GREEN BLUE YELLOW WHITE available)
Brightness	≥1000 NITS
Viewing angle	Horizontal:≥120°;Vertical:≥50°
Valid viewing distance	<300m
Brightness adjustment	Manual
Maintenance	Dot by dot
Control method	Controlled by PC Program via PEN DRIVE
Information transmission method	Synchron and balanceable transmission
Communication cable	Only required in case of serial port or Ethernet port programmable
Brightness difference between close PCB	≤3%
Out-of-control pixel	≤3/10000
Continuable operating period	≥72 hours
MTBF	≥5,000 hours
Life span	≥100,000 hours
Level up degree	≤±1mm
Assembly precision between PCB	≤1mm
Max. power consumption	≤ 41 watt per sq feet
Weight/m ²	About 4.5 kg per sq feet
Input voltage	AC220V/50Hz ±10%
Operating Environment	Temperature:-20□ - +60□ Humidity:10% - 90%RH
Operating system	Windows 98/2000/ME/XP/7
Display function	Synchron display kinds of text, graphics, pictures, signs, flashes.

LED Modules used in Tickers

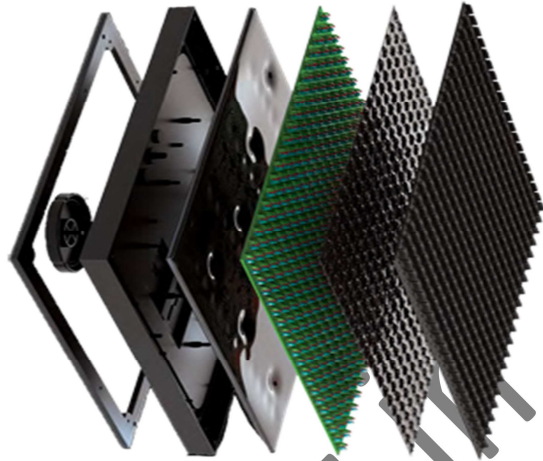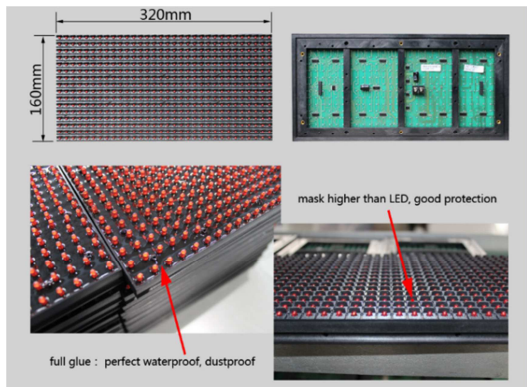

6" x 2 feet Single color



6" x 4 feet Single color



1 x 3 feet Single color




1 x 5 feet Single color



1 x 6 feet Single color



1.5 x 8 feet Single color

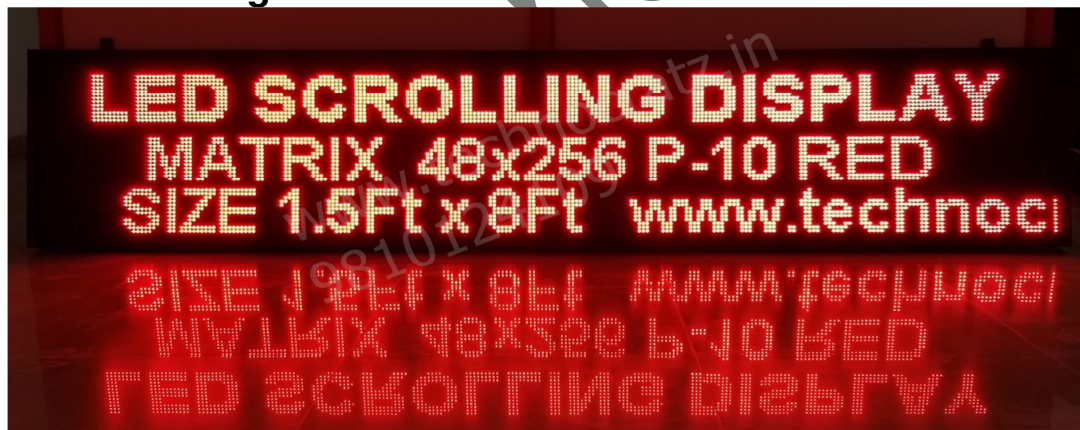


2 x 12 feet Single color



6" x 3 feet Multi color



6" x 4 feet Multi color

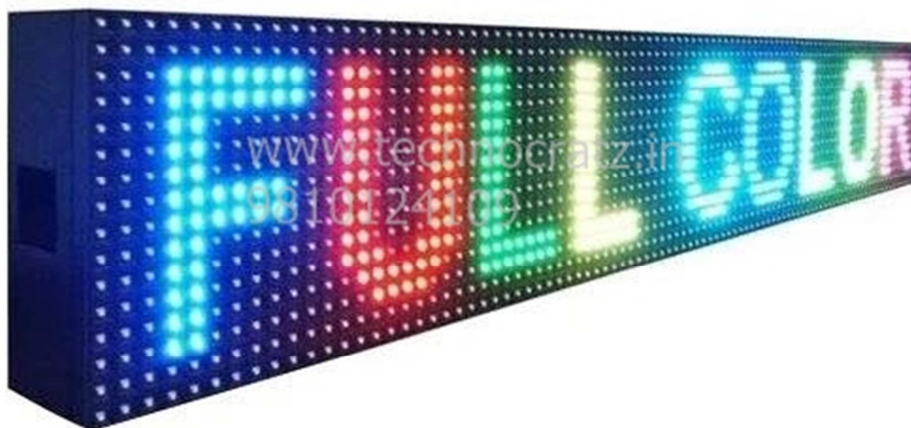


6" x 5 feet Multi color




6" x 18 feet Multi color



1 x 3 feet Multi color

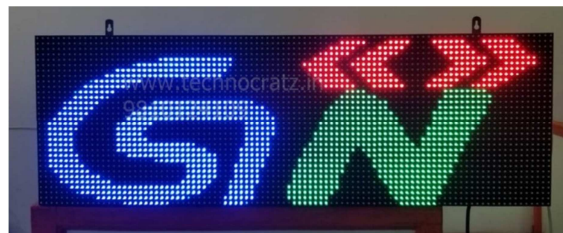

1 x 4 feet Multi color

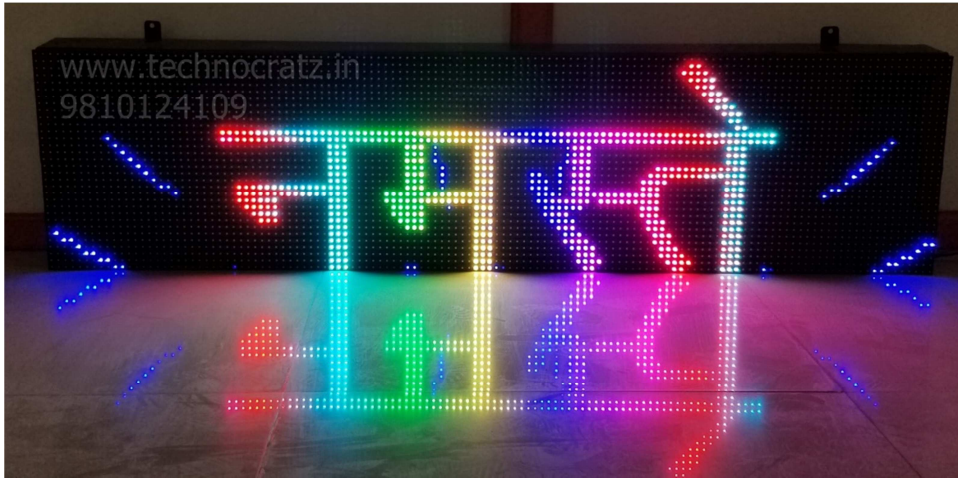

1 x 9 feet Multi color



1 x 10 feet Multi color





1 x 12 feet Multi color



Long Ticker Installations

